


03/02/99



OSTROLENK, FABER, GERB & SOFFEN, LLP

Attorneys at Law

1180 Avenue of the Americas
New York, New York 10036-8403

(212) 382-0700

Telex
23 6925Facsimile
(212) 382-0888Cable
Ostrofaber NewYork

Express Mail #EL010284103US

Asst. Commissioner of Patents and Trademarks
Washington, DC 20231

OFGS File No. : P/1905-80
 Inventor : Toshifumi SATO
 Title : CELLULAR SYSTEM
 Assignee : NEC Corporation

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

26 Pages of Specification including Abstract and Claims
 15 Numbered Claims Calculated as 15 Claims for Fee Purposes
 5 Sheets of Drawing Containing Figures 1 to 6.
 X Declaration and Power of Attorney
 X Priority is Claimed under 35 U.S.C. §119:
 Convention Date March 4, 1998 for Japan Appln. S.N. 10-051656
 X Certified Priority Application
 X Verified Statement Claiming Small Entity Status under 37 C.F.R. §1.27.
 X Assignment
 X Return-Addressed Post Card
 OFGS Check No. 82690, which includes the fee of \$1,034.00, calculated as follows:
 Basic Filing Fee: \$ 760.00
 Additional Filing Fees:
 Total Number of Claims in Excess of 20, times \$18:
 Number of Independent Claims in Excess of 3, times \$78: 234.00
 One or More Multiple Dependent Claims: Total \$260.
 Total Filing Fees or 994.00
 Total Filing Fee Reduced 50% for Small Entity:
 Assignment Recording Fee: \$40 40.00
 TOTAL Filing Fee and Assignment Recording Fee: \$1,034.00

In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE

Respectfully submitted,

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL010284103US) in an envelope addressed to: Asst. Commissioner of Patents and Trademarks, Washington, D.C. 20231, on March 2, 1999:
 Dorothy Jenkins

Name of Person Mailing Correspondence

Signature

March 2, 1999

Date of Signature

Steven I. Weisburd
 Registration No.: 27,409
 OSTROLENK, FABER, GERB & SOFFEN, LLP
 1180 Avenue of the Americas
 New York, New York 10036-8403
 Telephone: (212) 382-0700

CELLULAR SYSTEM

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to a mobile telephone/portable telephone system (cellular system) using a direct spread code division multiple access (DS-CDMA) scheme and, more particularly, to a cellular system characterized by a transmission method using pilot
10 channels for coherent detection and transmission power control.

2. Description of the Prior Art

 As a conventional technique of the present invention, an IS-95 system as a standard cellular system in North
15 America is available.

 In a forward link (base station → mobile terminal) according to the IS-95 specifications, a pilot channel commonly used for channels for all mobile terminals is prepared, and signals are constantly transmitted by using
20 about 20% of the base station transmission power. On the pilot channel, a single spread code having a relatively large length (a 2^{15} chip period = about 26.6 ms) is used, and a non-modulated signal (i.e., normally "0") is transmitted. The reception section of a given mobile
25 terminal estimates the transmission path of the radio

signal received by using this pilot channel (estimates the delay, phase, and amplitude). This transmission path is used to determine the de-spreading timing of a data channel addressed to the given mobile terminal and perform
5 coherent detection and RAKE combining.

Another conventional technique is a wideband CDMA scheme (to be referred to as a W-CDMA hereinafter), which has not been put into practice. The W-CDMA is a scheme that has been studied for the third-generation cellular
10 system (IMT-2000). Currently, in Japan, IMT-2000 standards proposals are being prepared by the Association of Radio Industries and Businesses (ARIB).

According to a conventional proposed W-CDMA scheme, a known pilot symbol (since this data is time-multiplexed
15 with another data, it is called a pilot symbol instead of a pilot channel unlike in IS-95) is added to a channel directed to each mobile terminal.

In IS-95, a pilot channel is prepared in only a forward link. In the conventional W-CDMA, pilot channels
20 are prepared for the respective data channels, and hence a pilot symbol is also added to a reverse link (mobile terminal → base station). The reception sections of a mobile terminal and a base station estimate a transmission path by using this pilot symbol as in IS-95, and the
25 estimated transmission path is used to demodulate data

through a data channel addressed to itself.

5 A pilot symbol is added to each data channel in W-CDMA in this manner to use an efficient coherent detection scheme by estimating a transmission path using the same method in both a reverse link and a forward link, thereby improving the reverse link quality. Another purpose of the addition of such pilot symbols is to reduce radio wave radiation in unnecessary directions by changing the directivity of the base station antenna for each
10 mobile terminal in a forward link so as to improve the forward link quality.

This method is called an adaptive antenna (adaptive array antenna) or smart antenna technique. This technique is a kind of space division multiple access (SDMA) in
15 terms of reuse of radio waves upon space division. In a CDMA cellular system, in which radio waves having the same frequency are used in all the cells, the SDMA is regarded as a promising future technique.

The first problem in the prior art is that the method
20 of preparing a common pilot channel to all terminals as in IS-95 described above does not match well with the technique of controlling transmission directivity for each mobile terminal by using an adaptive antenna array.

That the antenna directivity of the base station
25 changes for the respective mobile terminals means that a

The second problem in the prior art is that in the method of adding a pilot symbol to each channel as in the conventional W-CDMA scheme, the overheads of the pilot symbols become excessively large, resulting in poor transmission efficiency, especially in speech communication at a low data rate.

The third problem in the prior art is that when a
25 pilot symbol is added to each data channel, since large

power cannot be assigned, a high-quality reference signal cannot be obtained, although about 20% of the total transmission power of the base station can be assigned to obtain a high-quality reference signal when a common pilot channel is used as in IS-95 described above. The reference signal with poor quality must be improved by, for example, filtering. This influences the complexity of each terminal.

An adaptive array antenna is a future technique and hence should not be used in consideration of cost in the early stage of introduction. It is preferable that investment in equipment be made without any adaptive array antenna in the early stage of introduction, and investment in this technique as an improved technique is made with an increase in traffic.

Transmission path estimation does not depend on data rates. For this reason, when a high data rate is set, e.g., when data services are offered at 384 kbps, the overhead of a pilot symbol can be neglected. When, therefore, low-speed voice services are mainly offered, the common pilot channel scheme is advantageous, and the individual pilot channel scheme will become an indispensable technique in the future regardless of whether high-speed data services are mainly offered. Therefore, there are demands for a flexible scheme capable

of smoothly coping with changes in services in this manner.

SUMMARY OF THE INVENTION

The present invention has been made in consideration of the above situation in the prior art, and
5 has as its main object to provide a cellular system incorporating a flexible reference signal transmission method capable of selecting an optimal apparatus arrangement in accordance with the contents of a required service.

10 It is another object of the present invention to provide a transmission method which can obviate the necessity to change a pilot channel/data channel assigning method even if a system is optimized from a system introduction period in which voice services are mainly
15 offered with a relatively small traffic to a system expansion period in which high-speed data services are offered with a large traffic.

It is still another object of the present invention to simplify a mobile terminal apparatus when
20 voice services are to be mainly offered, improve the transmission efficiency, and efficiently accommodate high-speed data services when an SDMA technology is established in the future.

In order to achieve the above objects, according
25 to the basic aspect of the present invention, there is

provided a cellular system comprising transmission sections having N pilot channels, transmission/reception sections having M data channels, a plurality of antenna elements, a weighting matrix for antenna for generating L types of antenna directivity patterns by weighting the phases and amplitudes of signals transmitted from the respective transmission sections and transmission/reception sections and supplying the resultant signals to the respective antenna elements, a control section for supplying weighting coefficients to the weighting matrix for antenna and notifying a correspondence between data and pilot channels by using a control channel, and a transmission/reception section having a control channel for notifying a pilot channel corresponding to a data channel used for communication to each mobile terminal.

The present invention is characterized in that a combination of pilot and data channels is not fixed but can be dynamically changed in accordance with the use state of the data channel.

In this manner, a plurality of pilot channels are dynamically assigned in accordance with the use state of each data channel to allow a plurality of data channels having the same antenna directivity to share a pilot channel, thus effectively using pilot channel resources.

Even if a conventional system with a fixed antenna directivity shifts to an advanced system designed to realize space division reuse of frequencies by controlling the antenna directivity of an adaptive antenna array or the like, there is no need to change a pilot channel/data channel assigning method. Such a shift can therefore be easily made.

Another effect of the present invention is that the channel capacity can be maximized in accordance with a system configuration.

This is because interference acting on other channels can be minimized by transmitting signals using the necessary minimum number of pilot channels.

The third effect of the present invention is that a very flexible system can be realized.

This is because even if a conventional system with a fixed antenna directivity shifts in the future to an advanced system designed to realize space division reuse of frequencies by controlling the antenna directivity of an adaptive antenna array or the like, there is no need to change a pilot channel/data channel assigning method, and the shift can therefore be easily made.

The above and many other objects, features and advantages of the present invention will become manifest

to those skilled in the art upon making reference to the following detailed description and accompanying drawings in which preferred embodiments incorporating the principle of the present invention are shown by way of illustrative
5 examples.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a base station apparatus according to the basic aspect of the present invention;

10 Fig. 2 is a view for explaining the correspondence between antenna directivities, pilot channels, and data channels in the basic aspect;

Fig. 3 is a flow chart showing the operation of the basic aspect;

15 Fig. 4 is a block diagram showing an example of the arrangement of a pilot channel transmission section;

Fig. 5 is a block diagram showing an example of the arrangement of a data channel transmission/reception section; and

20 Fig. 6 is a block diagram showing an example of the arrangement of a weighting matrix for antenna and antenna elements.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The basic aspect of the present invention will be
25 described first with reference to the accompanying

drawings.

Fig. 1 is a block diagram showing a base station apparatus according to the basic aspect of the present invention. This basic aspect is associated with a cellular system for performing communication between the base station apparatus and mobile terminals.

Referring to Fig. 1, the base station apparatus is comprised of transmission sections 101 to 103 having N (N is a positive integer) pilot channels, transmission/reception sections 104 to 106 having M (M is a positive integer) data channels, a plurality of antenna elements 109, a weighting matrix for antenna 108 for generating L (L is a positive integer) types of antenna directivities patterns by weighting the phases and amplitudes of signals transmitted from the transmission sections 101 to 103, the transmission/reception sections 104 to 106, and a transmission/reception section 107 and supplying the resultant signals to the respective antenna elements 109, a control section 110 for supplying weighting coefficients to the weighting matrix for antenna 108 and making the data channels correspond to the pilot channels, and the transmission/reception section 107 having a control channel for notifying each mobile terminal of a pilot channel corresponding to the data channel to be used for communication on the basis of a

command from the control section 110. The operation of the basic aspect in Fig. 1 will be described next.

Referring to Fig. 1, reference symbols PL_1 to PL_N denote transmission signals on pilot channels 1 to N; Tch_1 to Tch_M , transmission/reception signals on data channels (also called traffic channels) 1 to M; and P_1 to P_N , transmission control signals (for ON/OFF control for transmission, instruction about transmission power, and the like) for pilot channels 1 to N.

On data channels 1 to M, the direction of a mobile terminal that is performing communication is estimated on the basis of reception, and the control section 110 is notified of the estimated mobile terminal. The control section 110 determines the optimal antenna directivity.

If the determined antenna directivity is being used on another data channel, and the corresponding pilot channel is being used for transmission, the control section 110 notifies the mobile terminal of the corresponding pilot channel number (or spread code) through the control channel. If this antenna directivity is not being used, an available pilot channel is selected to start transmission with the designated antenna directivity.

If the position of the mobile terminal is unknown before speech communication, communication may be started with an omni-directivity first, and the antenna

directivity and corresponding pilot channel may be changed when the direction of the mobile terminal is estimated.

If excess overhead results when pilot channels are separately set, as in voice terminals, wastes resulting from the overhead can be reduced by assigning a common pilot channel to a plurality of terminals.

When communication through a given data channel is complete, and another data channel does not share the corresponding pilot channel, transmission is stopped by using the corresponding pilot channel. If another data channel shares the pilot channel, transmission is continued by using the pilot channel.

Fig. 2 is a view for explaining the correspondence between antenna directivities and pilot and data channels in the basic aspect.

Fig. 2 shows an example of how pilot and data channels are assigned in accordance with antenna directivity patterns and the positions of mobile terminals. At this time, the antenna elements 109 are using four types of directivity patterns and pilot channels PC_1 to PC_4 . Any directivity pattern in a direction in which no terminal is performing speech communication is not used.

The pilot channel PC_1 covers all directions. This channel is used by a mobile terminal whose position is not detected immediately after the start of speech

communication, an in-car terminal that is moving near a base station BS at a high speed (i.e., a terminal whose direction changes at short intervals when viewed from the base station), or the like. The pilot channels PC_2 and PC_3 are shared among a plurality of data channels located in the same directions. The pilot channel PC_3 is shared among a plurality of voice terminals, and has a relatively wide directivity pattern. A data channel DC_4 is a high-bit-rate channel, to which one pilot channel PC_4 is exclusively assigned. This channel reduces interference with other channels by using a narrow antenna directivity pattern.

Fig. 3 is a flow chart showing the operation of the basic aspect.

Referring to Fig. 3, when communication is to be started, an available data channel is found first to ensure a data channel transmission/reception means (step F-1). If the direction of the mobile terminal is known at this time, the optimal antenna directivity for the direction of the mobile terminal is selected. If the direction of the mobile terminal is unknown, an antenna directivity in all directions in which the mobile terminal can exist may be selected (step F-2).

If another terminal exists in the direction of this antenna directivity and is performing communication (step

5

10

15

20

25

to release the data channel transmission/reception means (step F-9). If the same pilot channel is not being used by another data channel (step F-10), the transmission using the pilot channel is also stopped to release the pilot channel (step F-11). If the same pilot channel is being used by another data channel (step F-10), the processing associated with the data channel is terminated without stopping the transmission using the pilot channel.

An embodiment of the present invention will be described next with reference to Figs. 4 to 6.

Fig. 4 is a block diagram showing an example of the arrangement of a transmission section corresponding to data channel N.

Fig. 5 is a block diagram showing an example of the arrangement of a transmission/reception section corresponding to data channel M.

Fig. 6 is a block diagram showing an example of the arrangement of a weighting matrix for antenna and antenna elements.

Referring to Fig. 4, a transmission section for a pilot channel in this embodiment includes a spreading circuit 401 for spreading data consisting of "0"s alone by multiplying the data by a spread code $SC_N(Tx)$, a spread code generating circuit 403 for generating the spread code $SC_N(Tx)$, and a transmission power control circuit 402 for

controlling the transmission power for the spread signal. Different spread codes are assigned to the respective channels and hence used as means for discriminating the channels in code division multiple access (CDMA) sharing the same frequency among all the channels.

Referring to Fig. 5, a data channel transmission/reception means in this embodiment includes a spreading circuit 501 for spreading transmission data $d_M(Tx)$ with a transmission spread code $SC_M(Tx)$, a transmission power control circuit 502 for controlling the transmission power for the spread signal, a spread code generating circuit 503 for generating the transmission spread code $SC_M(Tx)$ and a reception spread code $SC_M(Rx)$, a delay circuit 504 for delaying the reception spread code $SC_M(Rx)$ in accordance with a delay in each path of multipath channels for reception signals, de-spreading circuits 505 that are equal in number to the paths and multiply the delayed reception spread signals and the reception signals through the data channels, integration circuits 506 that are equal in number to the paths and cumulatively add the de-spread signals for a 1-symbol time, and a RAKE combining demodulation circuit 507 for combining the outputs from the integration circuits 506 corresponding to the respective paths in phase at a maximum ratio.

Referring to Fig. 6, a weighting matrix for antenna on the transmission side in this embodiment includes weighting circuits 601 and 602 for weighting signals (including amplitudes and phases) to be output to the respective antenna elements over transmission signals on the respective channels with weighting coefficients $\{W\}$ supplied from the control section, addition circuits 605 that are equal in number to the antenna elements, each circuit adding/combining transmission signals in each channel, duplexers 606 which are equal in number to the antenna element, each allowing one antenna element to be used for transmission and reception, and a plurality of antenna elements 607. Similarly, on the reception side, the matrix includes a weighting circuit 603 for weighting the signal (including the amplitude and phase) received by each antenna element with a weighting coefficient $\{W\}$ supplied from the control section, and an addition circuit 604 for adding/combining the respective weighted reception signals.

The operation of the cellular system according to the present invention will be described next with reference to Fig. 6.

As in the basic aspect of the present invention described above, when data communication is to be started, the directivity of each reception antenna is determined to

maximize the signal-to-interference ratio (SIR) of a received signal. More specifically, it suffices if weighting coefficients $\{W_{M1}', W_{M2}', \dots\}$ are determined to maximize the short-time average of SIRs. In addition, the transmission directivity of each data channel is determined to have the same antenna directivity as that used for reception. In an ideal radio system (the gain and phase characteristics remain unchanged in transmission and reception), it suffices if coefficients complex conjugate to the weighting coefficients $\{W_{M1}', W_{M2}', \dots\}$ used for reception are used as transmission weighting coefficients $\{W_{M1}, W_{M2}, \dots\}$.

The above operation may be simplified by limiting the weighting coefficients $\{W_{M1}', W_{M2}', \dots\}$ and $\{W_{M1}, W_{M2}, \dots\}$ to "1"s and "0"s alone. That is, one (or a plurality) of antennas to which directivities are assigned in advance is selected and used for transmission/reception. In this case, the directivity in transmission can be easily matched with that in reception. This can greatly reduce the processing amount for antenna directivity determination and simplify adjustments to the gain and phase of the radio system. However, the degree of freedom in antenna directivity is limited.

Data channels can be made to correspond to pilot channels by notifying the spread codes used in the

respective channels. The transmission power for a pilot channel or data channel is controlled to 0 (OFF) to prevent unnecessary interference from disturbing other channels in use.

032600Z:030299

WHAT IS CLAIMED IS:

1. A cellular system using a code division multiple access (CDMA) scheme, comprising:

5 N (N is a positive integer) pilot channels for transmitting reference signals whose transmission signals are known in advance; and

M (M is a positive integer) data channels for transmitting information,

10 wherein each of said M data channels is made to correspond to one or a plurality of said N pilot channels.

2. A system according to claim 1, wherein each of said N data channels is made to correspond to one of said M pilot channels which goes through the same transmission path.

15 3. A system according to claim 1, wherein said pilot channel is used for coherent detection of at least said data channel to which said pilot channel is made to correspond.

20 4. A system according to claim 1, wherein said pilot channel is used for transmission power control on at least said data channel to which said pilot channel is made to correspond.

25 5. A system according to claim 1, wherein a correspondence between said pilot channel and said data channel is newly determined at least immediately before

and every time said data channel is used.

6. A system according to claim 1, wherein a correspondence between said pilot channel and said data channel can be changed during use of said data channel by
5 notifying a new correspondence.

7. A system according to claim 1, wherein said pilot channel stops transmission when use of all data channels made to correspond to said pilot channel is terminated.

8. A system according to claim 2, wherein when a
10 pilot channel which goes through the same transmission path as that for a data channel to be newly used is not being used for transmission, a new pilot channel which goes through the same transmission path as that for said data channel is generated and used to start transmission.

15 9. A system according to claim 1, wherein when channels used for transmission/reception with the same antenna directivity are determined as channels which go through the same transmission path.

20 10. A system according to claim 2, wherein when channels used for transmission/reception with the same antenna directivity are determined as channels which go through the same transmission path.

11. A cellular system using a code division multiple access (CDMA) scheme, comprising:

25 transmission means having N (N is a positive integer)

pilot channels;

transmission/reception means having M (M is a positive integer) data channels;

antenna means having L (L is a positive integer)

5 types of directivity patterns; and

notification means for notifying a correspondence between said data channels and said pilot channels,

wherein information to be transmitted/received by using each of said M data channels is transmitted/received
10 by selecting an optimal pattern from the L types of directivity patterns in accordance with a position of a mobile terminal used for communication,

a reference signal to be transmitted by using each of said N pilot channels is transmitted by selecting one
15 pilot channel for each directivity pattern used for said data channel, and

said notification means notifies a pilot channel used for transmission with the same directivity pattern as that for said data channel.

20 12. A reference signal transmission method in a cellular system using a code division multiple access (CDMA) scheme of transmitting N (N is a positive integer) reference signals whose transmission signals are known in advance by using pilot channels, and transmitting M (M is
25 a positive integer) pieces of information by using data

channels, comprising the step of

making each of said M data channels correspond to one or a plurality of said N pilot channels.

13. A reference signal transmission method in a
5 cellular system using a code division multiple access (CDMA) scheme of transmitting reference signals by using N (N is a positive integer) pilot channels, transmitting/receiving information by using M (M is a positive integer) data channels, performing
10 transmission/reception by using said data channels through antenna means having L (L is a positive integer) types of directivity patterns, and notifying a correspondence between said data channels and said pilot channels through notification means, comprising the steps of:

15 transmitting/receiving information to be transmitted/received by using each of said M data channels by selecting an optimal pattern from the L types of directivity patterns in accordance with a position of a mobile terminal used for communication;

20 transmitting a reference signal to be transmitted by using each of said N pilot channels by selecting one of said pilot channels for each directivity pattern which is being used on said data channel; and

causing said notification means to notify a pilot
25 channel which is being used for transmission with the same

directivity pattern as that for said data channel.

14. A base station apparatus in a cellular system using a code division multiple access (CDMA), comprising:

N (N is a positive integer) pilot channels for transmitting reference signals whose transmission signals are known in advance; and

M (M is a positive integer) data channels for transmitting information,

wherein each of said M data channels is made to correspond to one or a plurality of said N pilot channels.

15. A base station apparatus in a cellular system using a code division multiple access (CDMA) scheme, comprising:

transmission means having N (N is a positive integer) pilot channels;

transmission/reception means having M (M is a positive integer) data channels;

antenna means having L (L is a positive integer) types of directivity patterns; and

notification means for notifying a correspondence between said data channels and said pilot channels,

wherein information to be transmitted/received by using each of said M data channels is transmitted/received by selecting an optimal pattern from the L types of directivity patterns in accordance with a position of a

mobile terminal used for communication,

a reference signal to be transmitted by using each of
said N pilot channels is transmitted by selecting one
pilot channel for each directivity pattern used for said
5 data channel, and

said notification means notifies a pilot channel used
for transmission with the same directivity pattern as that
for said data channel.

2025 RELEASE UNDER E.O. 14176

ABSTRACT OF THE DISCLOSURE

A cellular system using a code division multiple access (CDMA) scheme includes N (N is a positive integer) pilot channels and M (M is a positive integer) data channels. The pilot channels are used transmitting reference signals whose transmission signals are known in advance. The data channels are used for transmitting information. Each of the M data channels is made to correspond to one or a plurality of said N pilot channels.

FIG.1

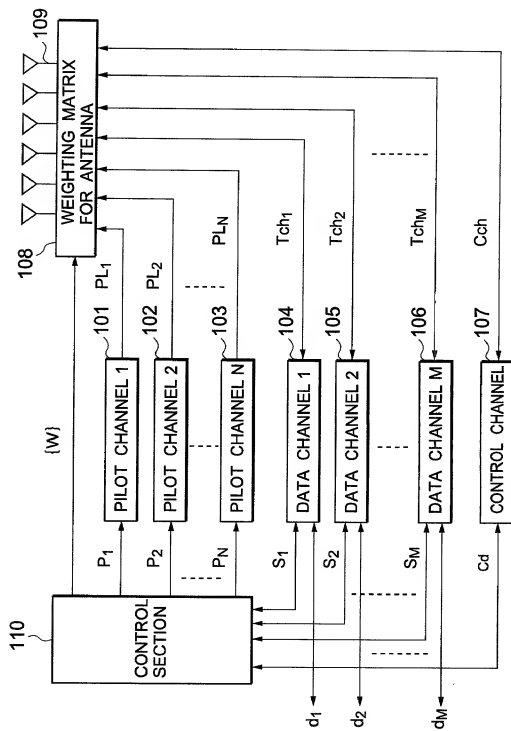


FIG.2

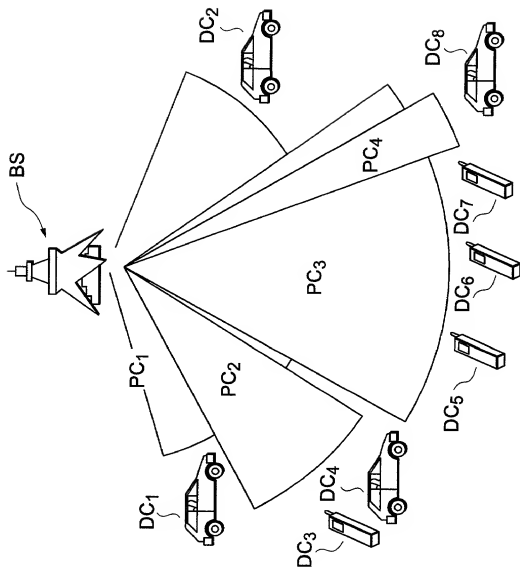


FIG.3

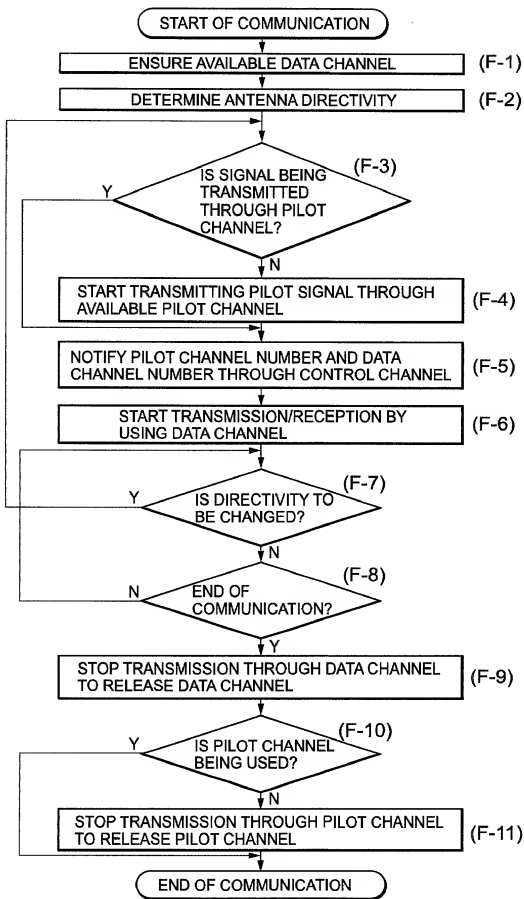


FIG.4



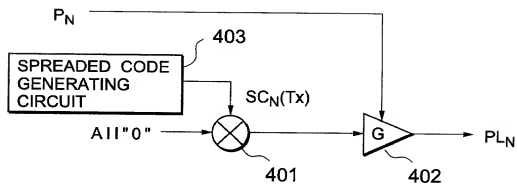


FIG.5

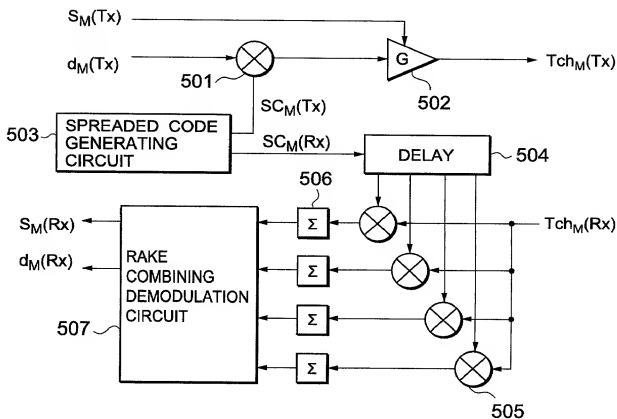

5/5

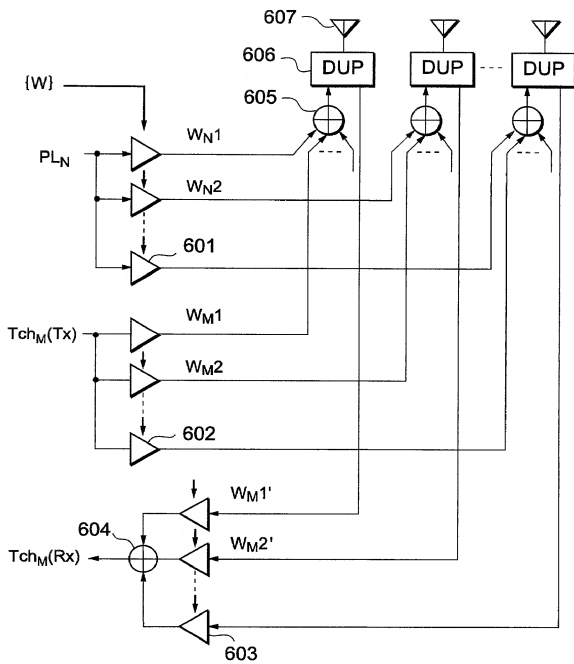

UNITED STATES OF AMERICA
 COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

 OFGS FILE NO.
 P/1905-80

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

CELLULAR SYSTEM

the specification of which is attached hereto, unless the following box is checked:

☐ was filed on _____ as United States patent Application Number or PCT International patent application number _____ and was amended on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign or Provisional Application(s)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Japan	051656/1998	4/3/1998	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)

I hereby appoint OSTROLENK, FABER, GERB & SOFFEN, and the members of the firm, Marvin C. Soffen - Reg. No. 17,542; Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,653; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberstein - Reg. No. 22,400; Steven I. Weisburd - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffin - Reg. No. 31,063; James A. Funder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944 and Louis C. Dujmich - Reg. No. 30,625, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent & Trademark Office connected therewith and to receive all correspondence.

SEND CORRESPONDENCE TO:

 OSTROLENK, FABER, GERB & SOFFEN
 1180 AVENUE OF THE AMERICAS
 NEW YORK, NEW YORK 10036-8403

 DIRECT TELEPHONE CALLS TO:
 (212) 382-0700

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Toshifumi SATO		INVENTOR'S SIGNATURE <i>Toshifumi Sato</i>	DATE February 22, 1999
RESIDENCE Tokyo, Japan		COUNTRY OF CITIZENSHIP Japanese	
POST OFFICE ADDRESS c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan			
FULL NAME OF SECOND JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	DATE
RESIDENCE		COUNTRY OF CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF THIRD JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	DATE
RESIDENCE		COUNTRY OF CITIZENSHIP	
POST OFFICE ADDRESS			